




Performance	Standby (kVA)	Prime (kVA)	Standby (kW)	Prime (kW)
	88	80	70	64

Engine		MOTEURS Baudouin
Engine configuration	Engine Model	4M10G4D0/S
	Method of Operation	4 Stroke
	Bore, (mm)	105
	Stroke, (mm)	118
	Aspiration	Turbocharged
	No. of Cylinders	4
	Battery Voltage	12
	Governor	Electronic
Lubrication system	Lube oil capacity, (L)	13
Fuel system	Specific fuel consumption at 100% Prime Power, (L/hr)	18.8
	Specific fuel consumption at 100% Standby Power, (L/hr)	21.3
Cooling system	Coolant capacity, (L)	17.9
	Coolant capacity (Without radiator), (L)	9.4
Exhaust system	Exhaust gas temperature after low pressure turbine at max Prime Power, C	700
	Exhaust gas temperature after low pressure turbine at max Standby Power, C	570
Emissions (NOx)	At Standby Power Rating	III A
	At Prime Power Rating	III A

Alternator

STAMFORD

Model	224G
Voltages	380_440
Connection	3 Phase
Temperature Rise	163.27°
PROTECTION SYSTEM	IP22
INSULATION CLASS	H
AVR	SX460

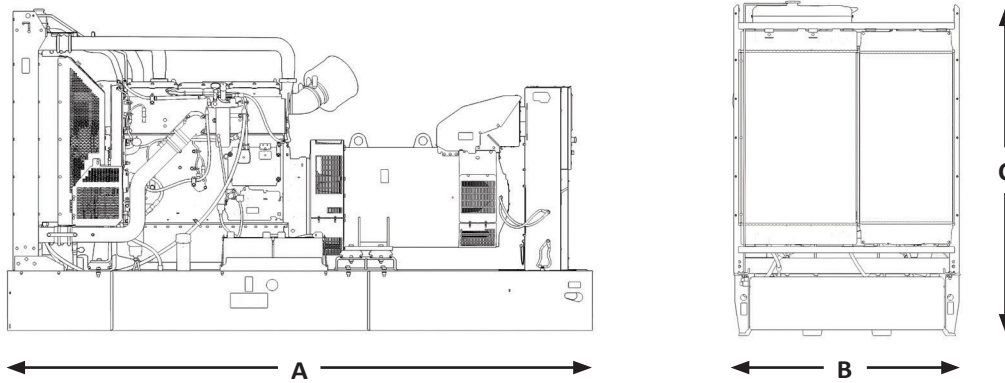

	Dim "A" mm	Dim "B" mm	Dim "C" mm	Dry Weight kg
Open Set	1750	750	1400	1070
Enclosed	2400	1000	1550	1316