


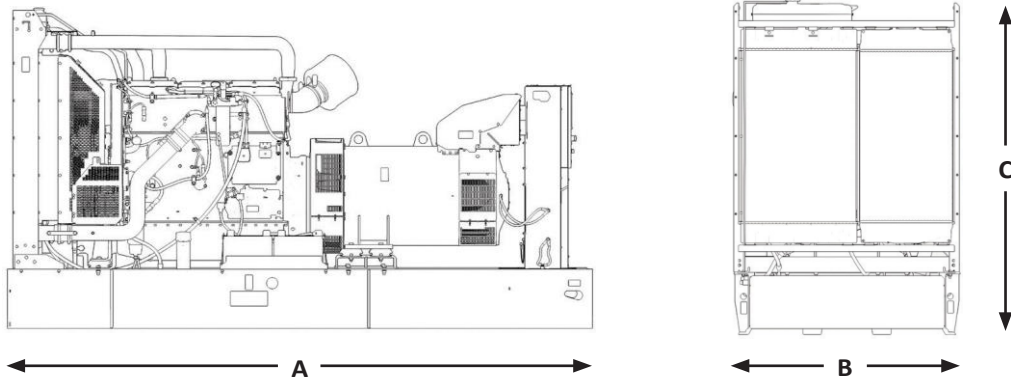
| Performance | Standby (kVA) | Prime (kVA) | Standby (kW) | Prime (kW) |
|-------------|---------------|-------------|--------------|------------|
| | 825 | 750 | 660 | 600 |

| Engine | |  |
|----------------------|--|---|
| Engine configuration | Engine Model | 6M33G825/5 |
| | Method of Operation | 4 Stroke |
| | Bore, (mm) | 150 |
| | Stroke, (mm) | 185 |
| | Aspiration | Turbocharged |
| | No. of Cylinders | 6 |
| | Governor | ECU |
| Lubrication system | Lube oil capacity, (L) | 64 |
| Fuel system | Specific fuel consumption at 100% Prime Power, (L/hr) | - |
| | Specific fuel consumption at 100% Standby Power, (L/hr) | 182.4 |
| Cooling system | Coolant capacity, (L) | 94 |
| | Coolant capacity (Without radiator), (L) | 44 |
| Exhaust system | Exhaust gas temperature after low pressure turbine at max Prime Power, C | ≤550 |
| | Exhaust gas temperature after low pressure turbine at max Standby Power, C | - |
| Emissions (NOx) | At Standby Power Rating | - |
| | At Prime Power Rating | - |

Alternator



| | |
|-------------------|---------|
| Model | 404G |
| Voltages | 380-440 |
| Connection | 3 Phase |
| Temperature Rise | 163.27° |
| PROTECTION SYSTEM | IP22 |
| INSULATION CLASS | H |
| AVR | SX440 |



| | | | | |
|----------|------------|------------|------------|---------------|
| Open Set | Dim "A" mm | Dim "B" mm | Dim "C" mm | Dry Weight kg |
| | 3500 | 1400 | 2100 | 5240 |
| Enclosed | Dim "A" mm | Dim "B" mm | Dim "C" mm | Dry Weight kg |
| | 4500 | 1700 | 2700 | 5774 |