


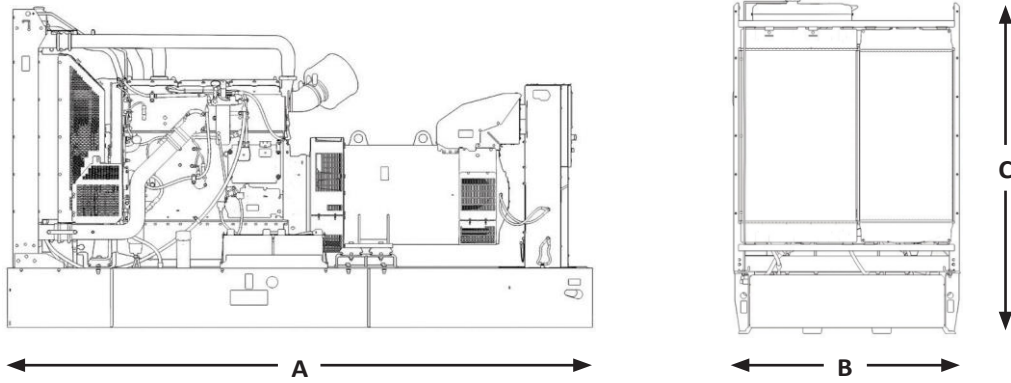
Performance	Standby (kVA)	Prime (kVA)	Standby (kW)	Prime (kW)
	120	110	96	88

Engine		
Engine configuration	Engine Model	1006TG2A
	Method of Operation	4 Stroke
	Bore, (mm)	100
	Stroke, (mm)	127
	Aspiration	Turbocharged
	No. of Cylinders	6
	Governor	Mechanical
Lubrication system	Lube oil capacity, (L)	16.1
Fuel system	Specific fuel consumption at 100% Prime Power, (L/hr)	25
	Specific fuel consumption at 100% Standby Power, (L/hr)	29
Cooling system	Coolant capacity, (L)	29.5
	Coolant capacity (Without radiator), (L)	-
Exhaust system	Exhaust gas temperature after low pressure turbine at max Prime Power, C	-
	Exhaust gas temperature after low pressure turbine at max Standby Power, C	-
Emissions (NOx)	At Standby Power Rating	-
	At Prime Power Rating	-

# Alternator

# BAValte

Model	274E
Voltages	380-440
Connection	3 Phase
Temperature Rise	163/27°
PROTECTION SYSTEM	IP22
INSULATION CLASS	H



	Dim "A" mm	Dim "B" mm	Dim "C" mm	Dry Weight kg
Open Set	1800	750	1400	1020
Enclosed	2350	1000	1550	1260